

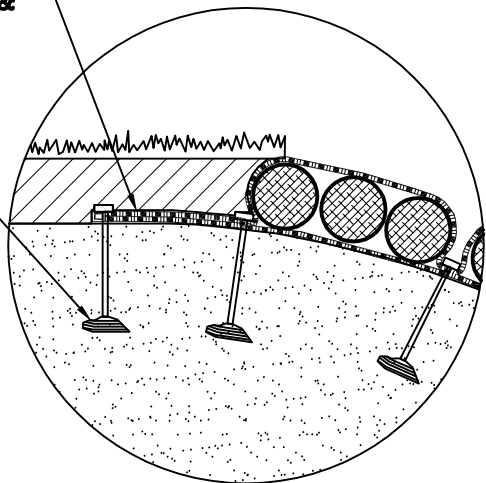


FLW 35 GEOGRID OR APPROVED GRID BY ENGINEER TO LINE SLOPE FACE & WRAP AROUND GROSOXX IN ONE CONTINUOUS PIECE, ANCHORING BETWEEN GROSOXX EVERY 30" MAX.

GRIPPLE SOIL ANCHOR (DEPTH AND ANCHOR STRENGTH TO BE BASED ON ON-SITE SOIL CONDITIONS DETERMINED BY ENGINEER)

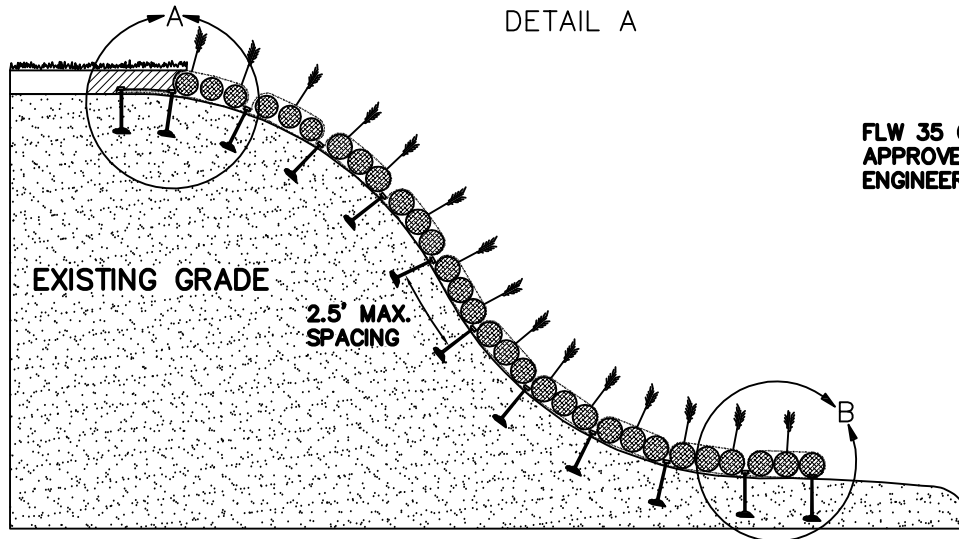


DETAIL A

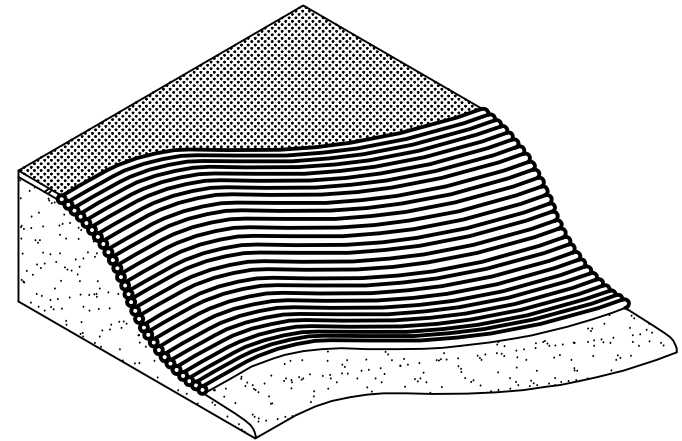

FLW 35 GEOGRID OR APPROVED GRID BY ENGINEER

LIVE WILLOW STAKES OR OTHER PLANT MATERIAL FROM SEED OR FROM LIVE PLUGS

8" DIA. - 3.0' LONG FILTREXX GROSOXX

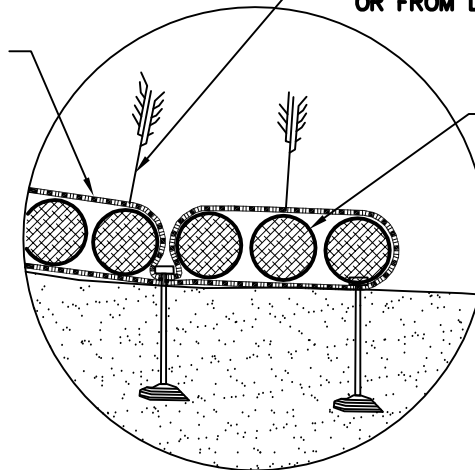

DETAIL B

NOTE: THIS APPLICATION IS FOR SURFICIAL STABILITY ONLY (GEOTECHNICAL ENGINEER SHOULD EVALUATE DEEP SEATED SLOPE STABILITY SEPARATELY)

*NO GEOGRID STRANDS ARE ALLOWED TO BE CUT IN ORDER TO INSERT PLANTS IN ANY CASE.



These graphic representations are intended for preliminary design purposes only and are not to be used for construction without the signature of a registered professional engineer.

SCALE:
NONE

GREENLOXX VEGETATED SLOPE FACING DETAIL (STYLE 1)